




En İyisi - The Best



PALETLİ TİP PNÖMATİK MOTOR VANE TYPE PNEUMATIC MOTOR

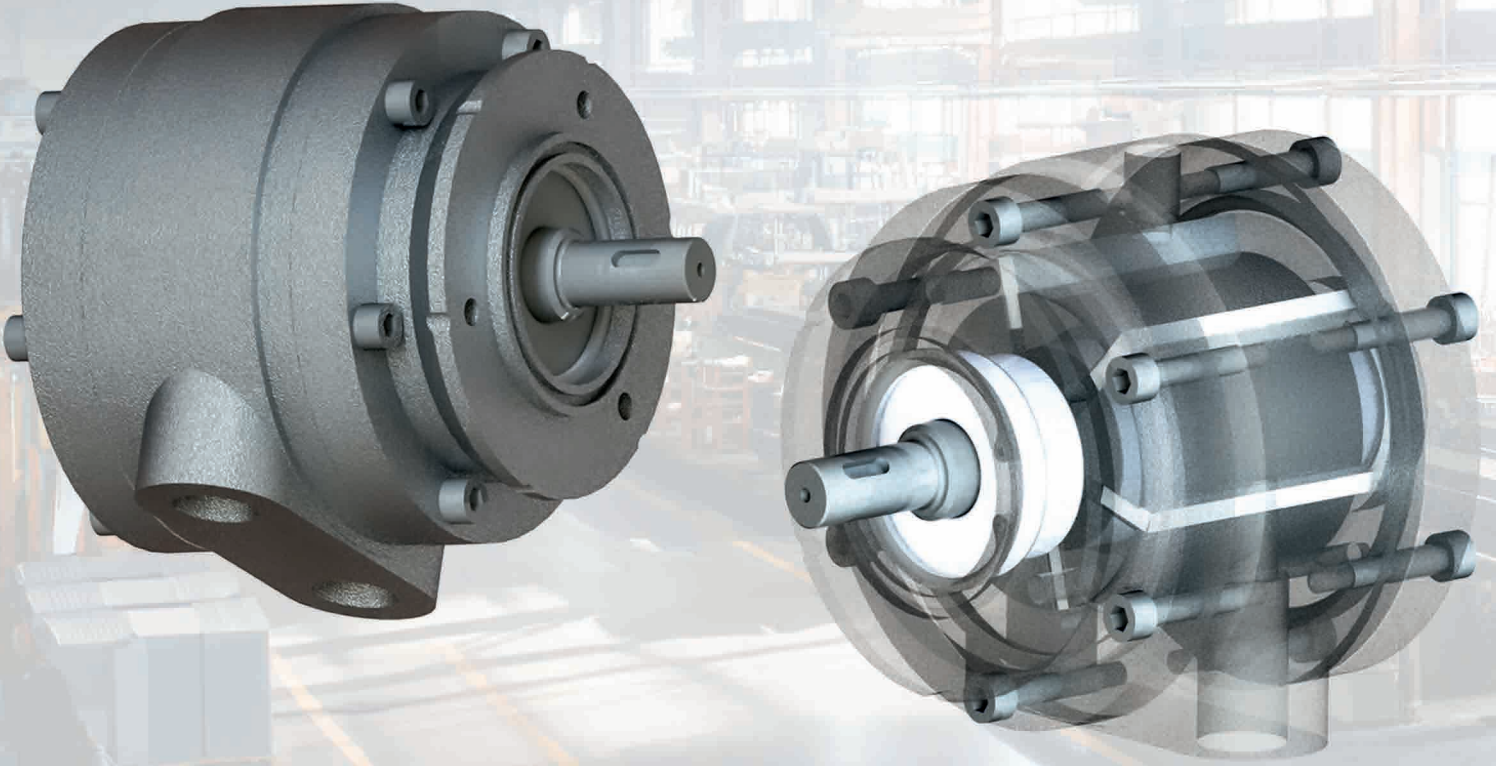


- Hava motorları toza, neme ve sıcaklık dalgalanmalarına karşı dayanıklıdır ve tehlikeli çevre koşullarında bile ATEX versiyonuyla kullanılabilir.
- Sürekli olarak dur-kalk ve yön değiştirme ısınma veya başka bir hasara neden olmaz.
- Olumsuz çevre koşullarından etkilenmez.
- Ayarlanabilir hız ve isteğe göre redüktör ile belirleyebileceğiniz Tork değerlerinde çalışır.
- Her uygulamaya kolayca adapte edilebilir.
- Isı yok, Elektrik yok, Kıvılcım yok, Hidrolik Sıvı yok, Sızıntı yok, Kirlenme yok, Yangın Tehlikesi yok, Basınç Dalgalanması RİSKİ YOK

- Air motors are resistant to dust, humidity and temperature fluctuations and can be used with ATEX version even in hazardous environmental conditions.
- Continuous stop-start and direction change does not cause heating or other damage.
- It does not effect by adverse environmental conditions.
- It works at adjustable speed and torque values that you can specify with the optional reducer.
- It can be easily adapted to any application.
- No heat, No electricity, No sparks, No hydraulic fluid, No leaks, No contamination, No fire hazard, NO RISK of pressure surges



TIGER Pnömatik Motorlar, %100 SET-A MAKİNA tarafından üretilmiştir.
TIGER Air Motors are manufactured 100% by SET-A MAKİNA





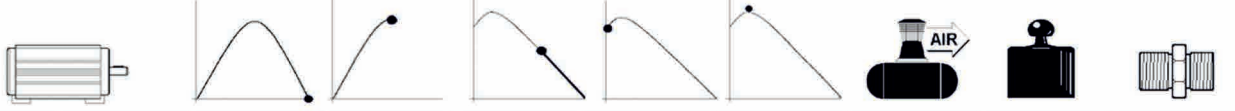


Model	kW	HP	d/d (rpm)	d/d (rpm)	Nm	Nm	Nm	l/s (m ³ /min)	Kg	
ZM10	1,6	2,2	7000	3850	3,9	5,5	7,8	33 (1.98)	6,3	G 1/2"
ZM80	2,6	3,5	6000	3300	7,5	10,4	15	45 (2.7)	8,1	G 1/2"
STRC1650	1,1	1,5	7000	3850	2,7	3,8	5,4	25 (1.5)	5,4	G 1/2"
	Maksimum Verimde Güç		Yüksüz Max Hız	Maksimum Güçte Hız	Maksimum Güçte Tork	Minimum Başlangıç Torku	Durma Torku	Hava Tüketimi	Ağırlık	Hava Giriş Bağlantısı
	Power at Maximum Efficiency		No-load Max Speed	Speed at Maximum Power	Torque at Maximum Power	Minimum Initial Torque	Stall Torque	Air Consumption	Weight	Air Intake Connection

Değerler 6 bar basınçta çalışma değerleridir.


The values have been measured while operating at 6 bar pressure.

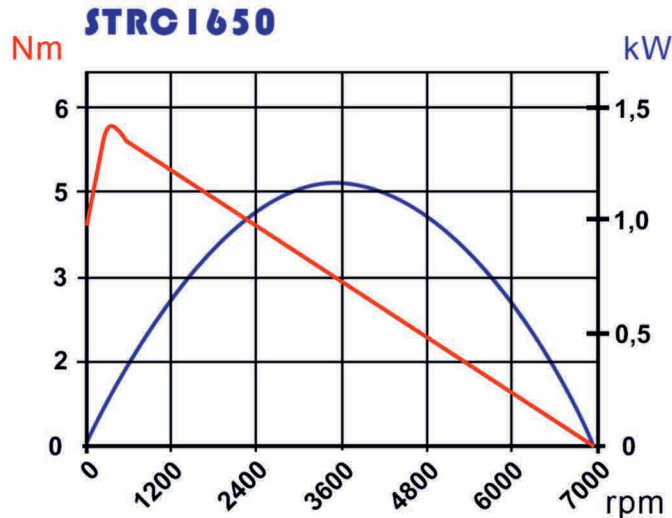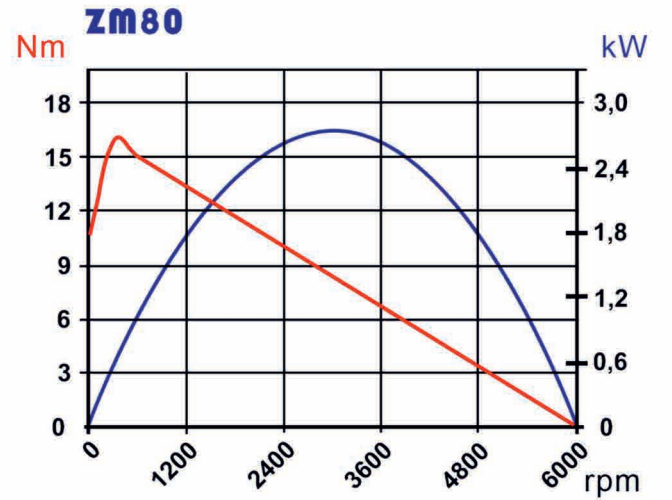


ZM10



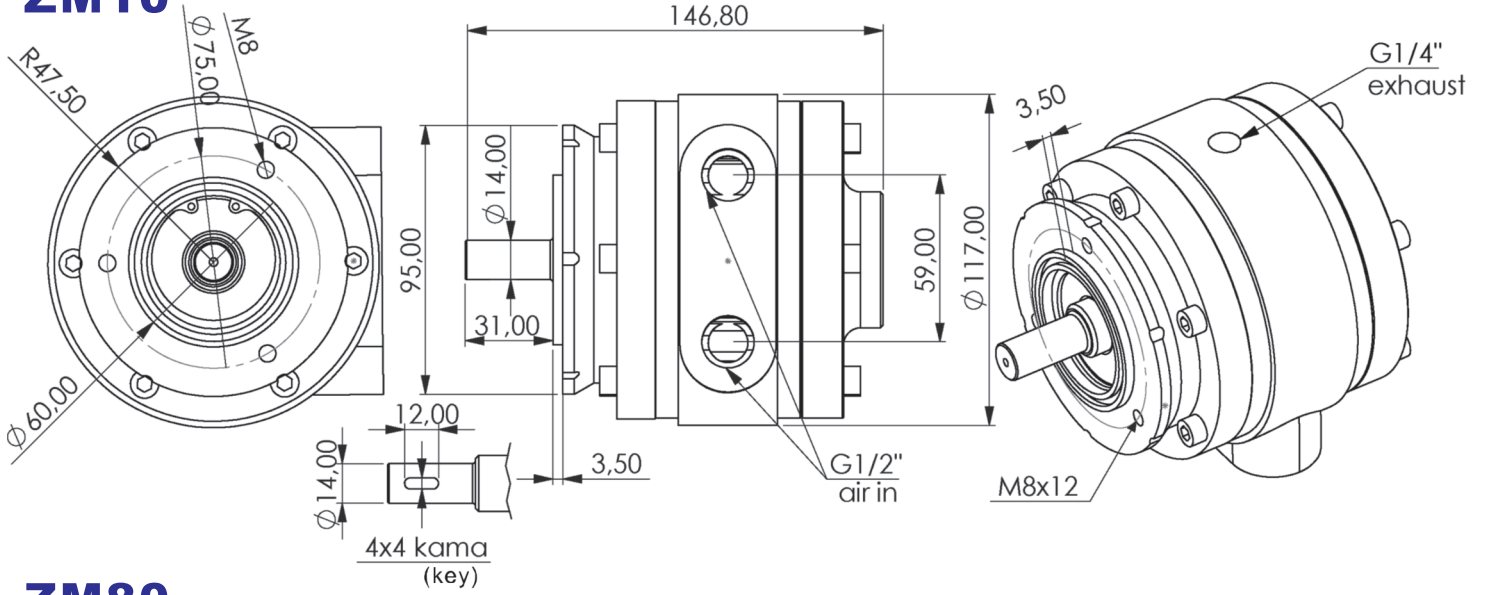


ZM80

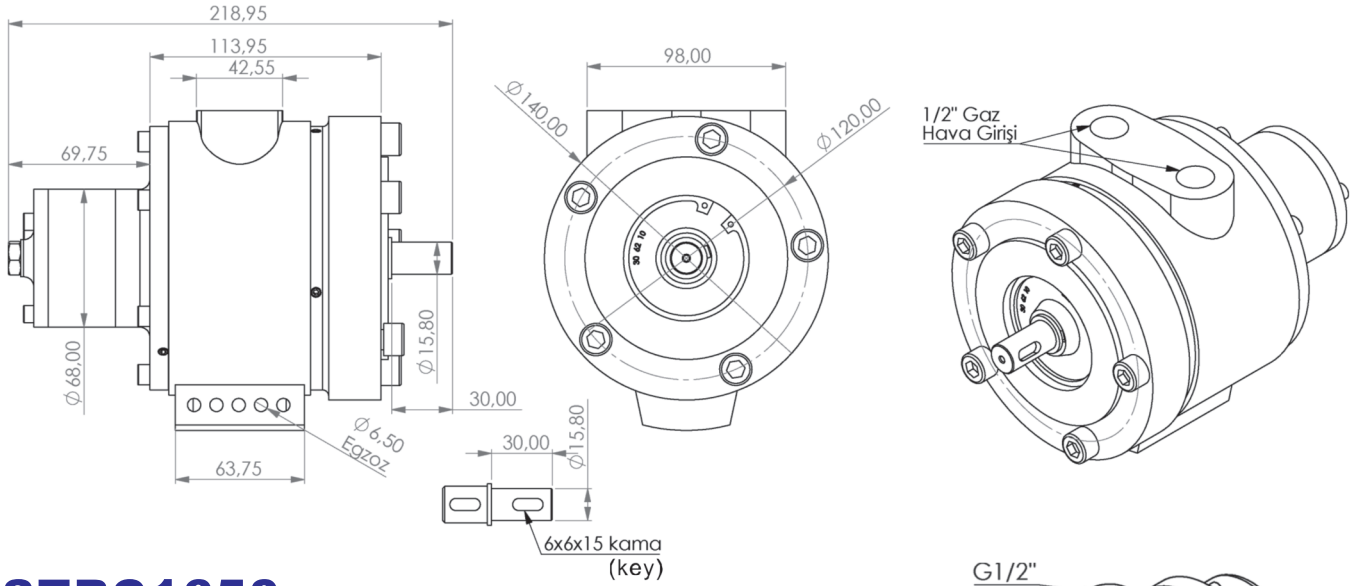

STRC1650

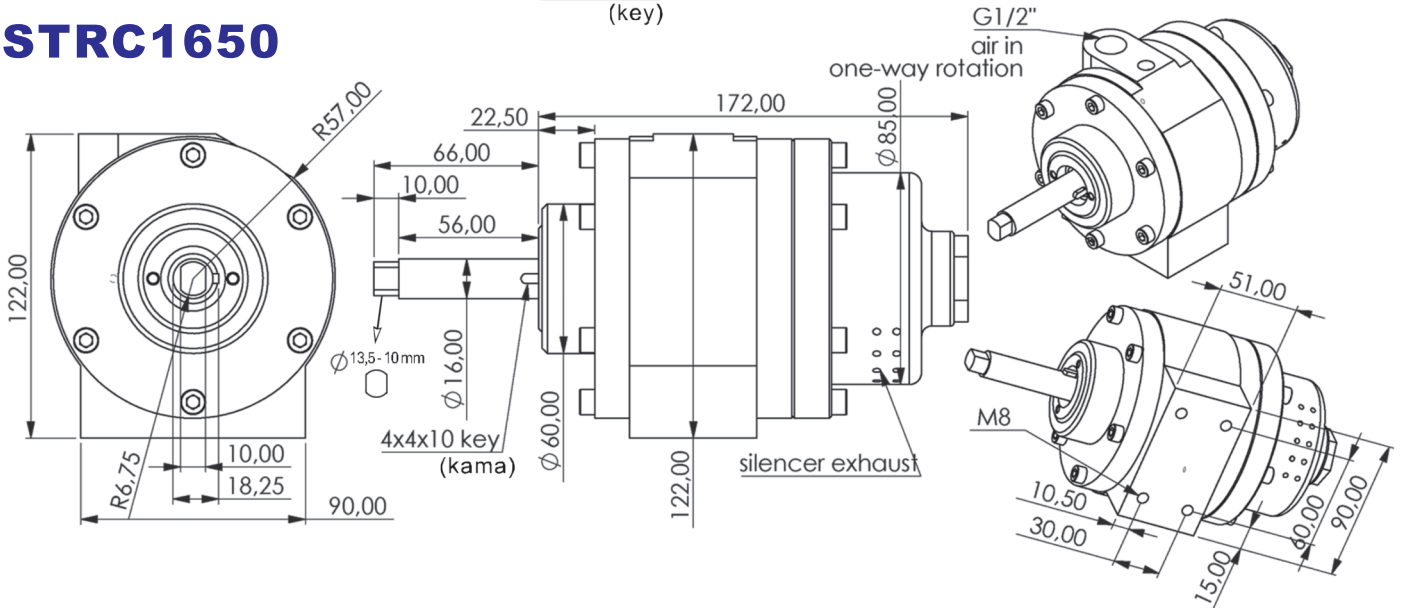

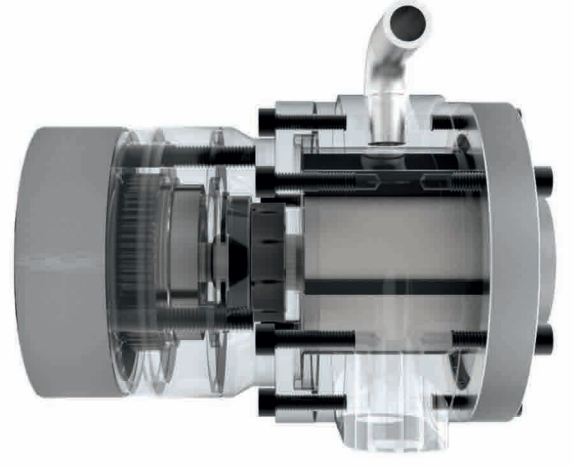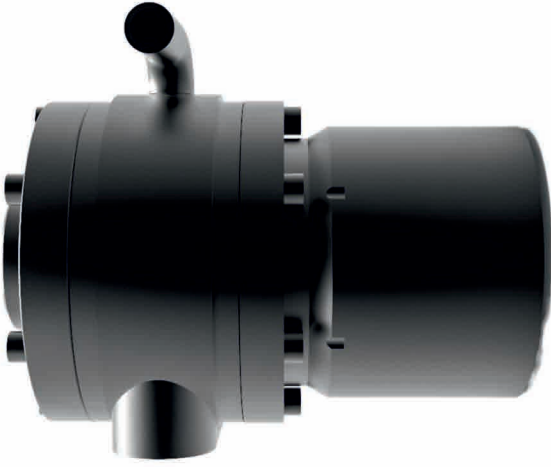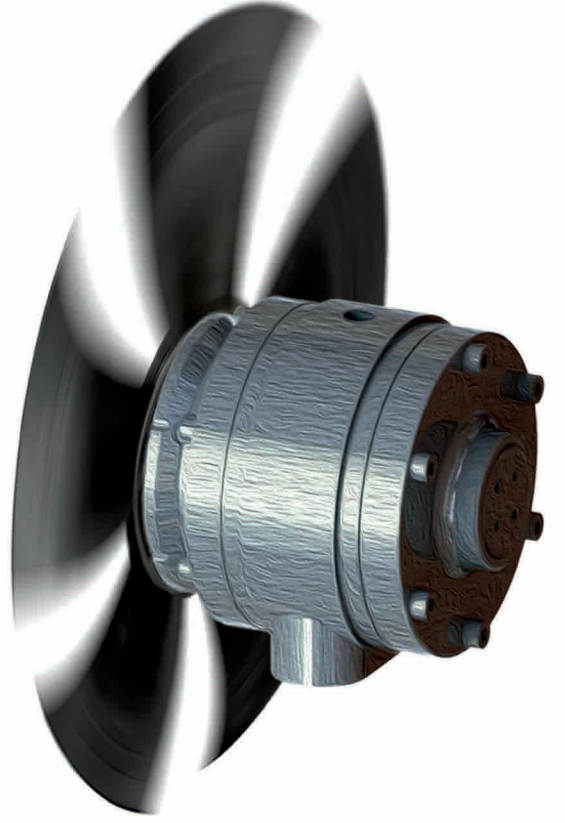

SET-A MAKİNA SANAYİ VE TİCARET A.Ş.

İvedik Organize Sanayi Bölgesi 1419.Cad. No: 60 06370 Ostim, Yenimahalle, Ankara / TÜRKİYE
Tel: +90 (312) 395 34 00 Faks: +90 (312) 395 36 00
info@setmakina.com

www.setmakina.com



www.setmakina.com

